


CBR MODULAR EXTERNAL FINISH BORING HEAD

CBR Modular External Finish Boring Head 《Boring Range from Ø10 - Ø1550mm》

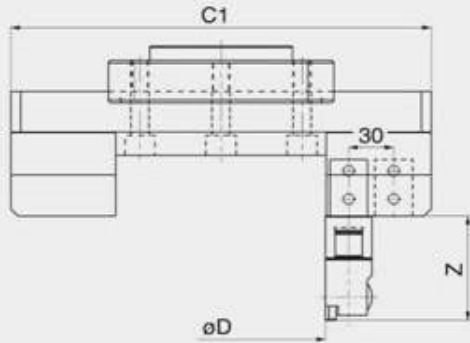

Specifications:

搪頭 型號 Boring Head Type	型號 Type	CBR200	CBR300	CBR400	CBR500	CBR600	CBR900	CBR1200	CBR1600
	搪頭長度 L2 (mm)	190/220							
	有效長 Z (mm)	70/100							
	C1 (mm)	180	280	380	480	580	880	1180	1580
	整組重量(kg) Total Weight (kg)	7	8	8.8	9.6	16	22.3	35	40
	加工直徑 Boring Diameter øD (mm)	10-150	10-250	10-350	10-450	200-550	200-850	400-1150	800-1550
組合 型式 Module	接合刀桿 Taper Shank	BT50-BST-100L				BT50-FMA-47.625			
	連接盤 Flange	BR200				BR600	BR900	BR1200	BR1600
	重量 (kg) Weight	合金鋼 Alloy Steel 2.7 kg				鋁合金 Alum. Alloy 8.8, 13.5, 24.4, 29.6			
	橫向滑板(鋁合金) Extension Slide Alum. Alloy	RST200	RST300	RST400	RST500	RST300 x 2 pcs	RST400 x 2 pcs	RST500 x 2 pcs	
	重量 (kg) Weight	1.1	1.9	2.7	3.5	3.8	5.4	7	
	平衡滑塊 Balance Weight	RBN200							
	重量 (kg) Weight	1.6 kg							
	外露滑塊 Clamp Base	HBR200							
	重量 (kg) Weight	1.3 kg							
	外圍用接桿 Adapter for External Boring	C25-LBK3-30				C25-LBK3-60			
	重量 (kg) Weight	0.3				0.5			
	接合刀頭 Applicable Boring Heads	CBH32							