

Auto Lathe

EQ series

Specifications:

Model		RC-25HQ	RC-25EQ
Capacity	Max. Turning Diameter	Ø26mm	Ø26mm
	Max. Turning Length	100mm	100mm
	Bar capacity	Ø26mm	Ø26mm
	Min. Input Unit	0.001mm	0.001mm
Tool	O. D. Tool	16mm	16mm
	I. D. Tool	C20-ER16	C20-ER16
	I. D. Tool Bushing	6、 8、 10、 12、 16 X 2 (Opt.)	6、 8、 10、 12、 16 X 2 (Opt.)
Spindle	Max. Spindle Speed	6000RPM	6000RPM
	Spindle Nose	Ø85mm	Ø85mm
Axis Stroke	X-Axis Stroke	170mm	220mm
	Z-Axis Stroke	170mm	170mm
	X, Z Rapid Speed	16 m/min	16 m/min
Motor	Spindle Motor	3KW	3KW
	X, Z Axis Motor	0.75KW	0.75KW
	Hydraulic Motor	0.75KW	0.75KW
	Coolant Pump Motor	0.37KW	0.37KW
General	Coolant Tank Capacity	40L	65L
	Machine Dimension	L1250×W1020×H1500mm	L1500×W1250×H1630mm
	Machine Weight (N. W.)	1300Kg	1300Kg
	Power Supply	AC/3PH/220V/8KW	AC/3PH/220V/8KW
	CNC Controller	SYNTEC EZ、 LNC T515i、 MITSUBISHI - E70	SYNTEC EZ、 LNC T515i、 MITSUBISHI - E70

Turning Tool Holders up base and down base x2

Drill Holder (4 Holes) X4

Stop Barx1

Drilling Shaft x3

Oil Bottom Panx1

Optional Accessories

Spindle Collets(148E #20; 161E #25)

Side Power Driven Tool (Servo Motor) (RC-25EQ With SYNTEC Controller ONLY)

Hydraulic 6 Position Turret (RC-25EQ ONLY)

Oil Mist Collector

Auto Bar Feeder Machine


Parts Conveyor

Chip Conveyor With Cart


Auto Volt. Stabilizer (10KVA)

Auto Volt. Transformer & Stabilizer (10KVA)

Tool System

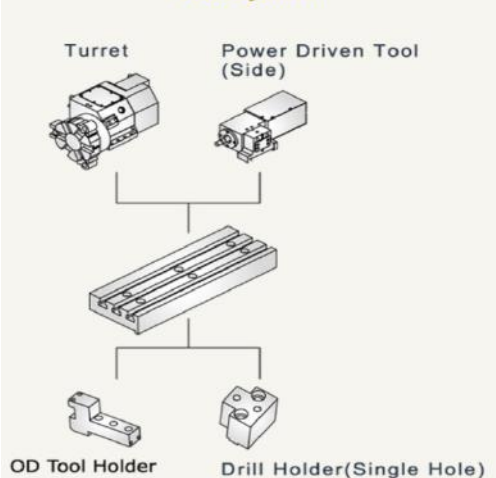

Working Range

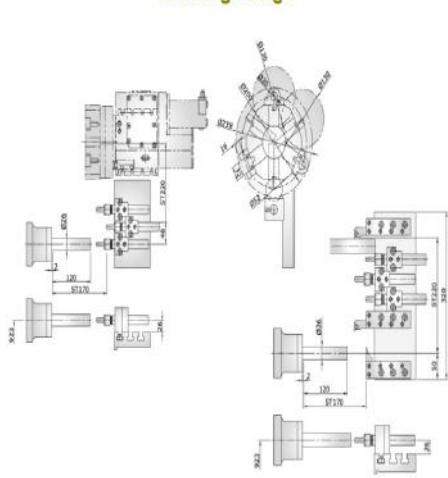

Dimension

