

Auto Lathe


RC series

Specifications:


Model		RC-20P	RC-20	RC-25	RC-32	RC-42
Capacity	Max. Turning Diameter	Ø21mm	Ø21mm	Ø26mm	Ø33mm	Ø42mm
					Ø100mm	
	3-Jaw Max. Turning Diameter	---	---	---	(0~3000rpm)	---
	Max. Turning Length	100mm				
	Min. Input Unit	0.001mm				
Tool	O. D. Tool	□12mm or □16mm				
	I. D. Tool	C20 – ER16				
	Number of Tool	Turning Tools 6 pcs, I.D. Turning Tools 4 pcs				7~11pcs
		Power Driven Tool 1 pc Total 11 pcs				
Spindle	Max. Spindle Speed	6000RPM				4500RPM
Axis Stroke	X-Axis Stroke	340mm				
	Z-Axis Stroke	150mm				
	X/Z Rapid Speed	16 m/min				
Motor	Spindle Motor	2KW	2KW	3KW	4.5/5KW	5.5/7KW
	X/Z-axis Motor	0.75KW				
	Hydraulic Motor	---	0.75KW			
	Coolant Pump Motor	0.36KW	0.56KW			
General	Coolant Tank Capacity	130L				
	Machine Dimension	Original Outer Casing L2000 × W1350 × H1835mm				
		Aesthetic Outer Casing L2070 × W1565 × H1885mm				
	Machine Weight (N. W.)	Original Outer Casing 1600kg				1650kg
		Aesthetic Outer Casing 1650kg				1700kg
	Power Supply	AC/3PH/220V/8~10KW				
	CNC Controller	SYNTEC 10A、LNC T618、MITSUBISHI-E70				

Standard Accessories
Turning Tool Holders ×3
Drill Holder (Single Hole) Ø20mm ×2
Drill Holder (Double Holes) Ø20mm ×1
Stop Bar×1
Drilling Shaft ×3
Oil Bottom Pan×1
Optional Accessories
Spindle Collets (EUGVO 1020; FUJI 1125; FUJI1132; INDEX 42#)
Side Power Driven Tool (Servo Motor)
Vertical Power Driven Tool (Servo Motor)
Front Power Driven Tool (Servo Motor)
Auto Bar Feeder Machine
Parts Conveyor
Chip Conveyor With Cart
Oil Mist Collector
Auto Volt. Stabilizer (10KVA)
Auto Volt. Transformer & Stabilizer (10KVA)

Tool System


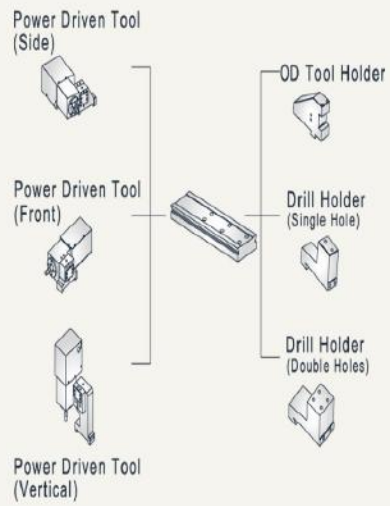


Working Range

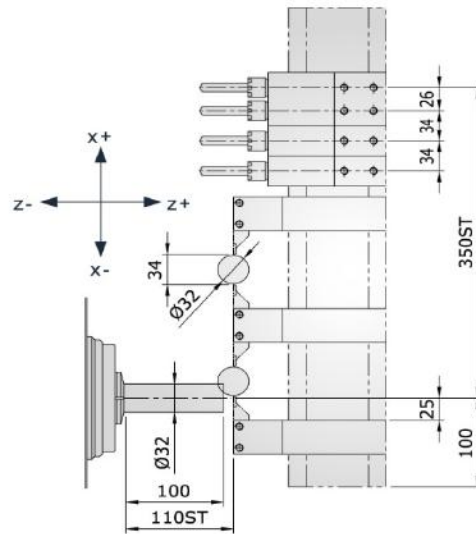

Dimension

Aesthetic Outer Casing

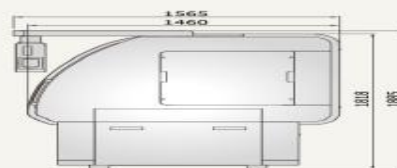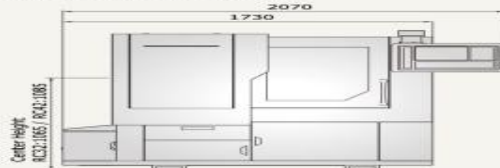

Original Outer Casing

