


STANDARD POLE ELECTROMAGNETIC CHUCK - DE-A

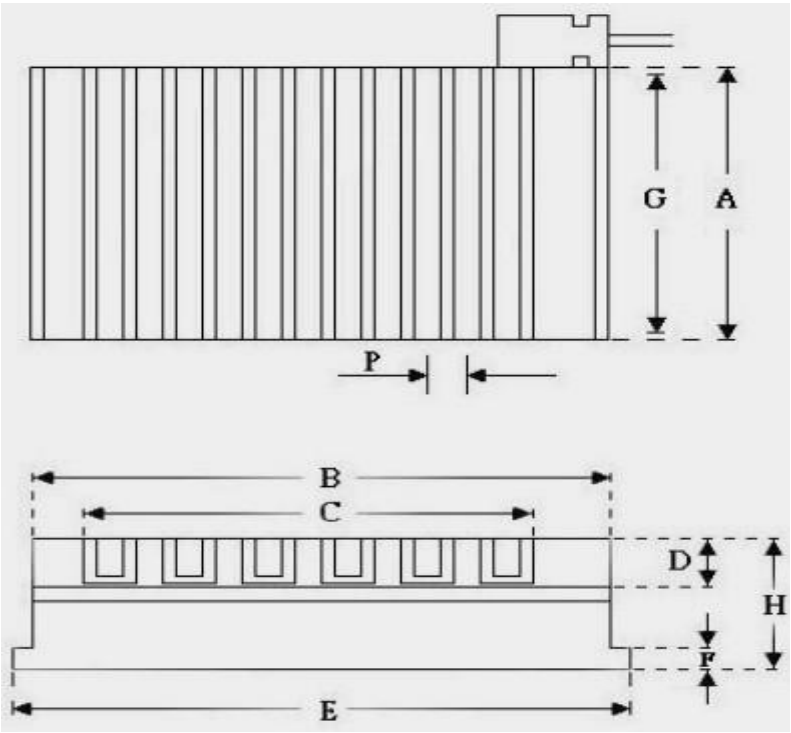

MODEL	Dimension	Workpiece Size				Magnetic pole Pitch		Datum plane				Voltage	Electric current	N.W(KG)
		A	B	C	D	P	G	E	F	H				
DE-1530A	150*300	150	300	228	20	15 (3+12)	144	316	20	70	90V	0.15A	21	
DE-1535A	150*350	150	350	288	20	15 (3+12)	144	366	20	70	90V	0.18A	25	
DE-1545A	150*450	150	450	378	20	15 (3+12)	144	466	20	70	90V	0.24A	32	
DE-2040A	200*400	200	400	348	20	15 (3+12)	194	416	20	70	90V	0.47A	38	
DE-2550A	250*500	250	500	438	20	15 (3+12)	240	500	20	70	90V	0.73A	67	
DE-3060A	300*600	300	600	529	20	15 (3+12)	290	600	20	70	90V	0.97A	97	
DE-4080A	400*800	400	800	725	20	19 (3+16)	390	800	20	80	90V	1.56A	182	
DE-40100A	400*1000	400	1000	936	25	19 (3+16)	390	1000	20	80	90V	1.60A	228	
DE-50100A	500*1000	500	1000	936	25	19 (3+16)	490	1000	20	80	90V	1.72A	285	